



Donaldson  
FILTRATION SOLUTIONS


# Compressed Air Filtration

## AG / SG / HD Adsorption Filter

AK

### MAIN FEATURES & BENEFITS:

- Activated carbon filter with integrated particle filter for the retention of oil vapours, hydrocarbons and odours as well as particles from compressed air or gases in industrial applications
- Innovative filtration technology; high adsorption capacity and retention rate with low differential pressure
- Validated performance data acc. to ISO 12500; reliable achievement of compressed air quality acc. to ISO 8573-1
- Flow-optimised design, minimum pressure loss for economic compressed air purification (saving of energy costs)

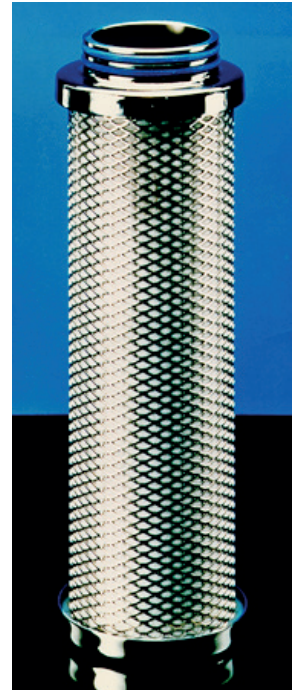

Depth filter AK

### INDUSTRIES



- Chemical and pharmaceutical industry



- PCB assembly and CD manufacturing



- Surface finishing



- Machine building industry and plant engineering / construction



- Energy and power generation

Donaldson Filtration Deutschland GmbH  
Büssingstr. 1  
D-42781 Haan  
Tel.: +49 (0) 2129 569 0  
Fax: +49 (0) 2129 569 100  
E-Mail: [CAP-de@donaldson.com](mailto:CAP-de@donaldson.com)  
Web: [www.donaldson.com](http://www.donaldson.com)

Donaldson®  
Ultrafilter

## PRODUCT DESCRIPTION

The adsorption filter AK consists of 2 filter stages. At the adsorption stage oil vapour, hydrocarbons and odours are removed by activated carbon adsorption. Particles are removed at the depth filter stage, consisting of microfibre fleece. In addition, support fleece and an outer stainless steel support sleeve ensure proper fixation of the adsorption and filter stage.

The flow direction through the filter is from inside to outside.

At appropriate prepurification (see „Recommended prepurification“) a residual oil content of  $< 0,003 \text{ mg/m}^3$  is achieved.

The specified performance data for the achievement of the compressed air quality classes according to ISO 8573-1 were validated according to ISO 12500-2.



**Cross section of the depth filter AK**

**The AK filter element is designed and developed for the following applications:**

- **Downstream applications:**  
Final filtration for control and process air, processing of technical oil-free compressed air
- **Breathing air applications:**  
Removal of oil vapours, miscellaneous hydrocarbons as well as particles in breathing air applications
- **Automotive industry:**  
Purification of paint and lacquering finishing air

## PRODUCT SPECIFICATIONS

Features	Benefits
Intelligent overall concept	Flow range, filtration grades, efficiencies and available options perfectly meet requirements of air purification
Flow-optimised Design	Minimum pressure losses, thereby savings of energy costs
High packing density and inner surface of activated carbon medium	High adsorption capacity and improved efficiency guarantee optimum purification performance over the whole life time
Microfibre fleece depth filter stage at filter outlet	Improvement of particle retention - class 1 acc. to ISO8573-1 achievable

Materials	
Adsorption stage	Activated carbon granulate on support fleece
Filter medium (particle filter stage)	Binderfree borosilicate
Support fleece	Polyamide fleece
Bonding	Polyurethane
End caps	Aluminium
O-Rings	Perbunan: silicone free and free of compound (standard)
Support liners	Stainless steel 1.4301/ 304


Adsorption efficiency of A (some examples)			
Oil vapour	A	Methyl acetate	B
Benzene	A	Sulphuric acid	A
Ethane	D	Hydrogen sulphide	C
Toluene	A	Chlorine	B
Acetic acid	A	Freon	C
Methanol	B	Ammonia	C
Acetone	B	Citrus fruits	A
Isopropyl ether	A	Parfumes	A

Key
A = very good
B = good
C = poor
D = slight

## PERFORMANCE DATA

Application data	
Recommended application temperature:	+10°C...+40°C (Tmax = +60°C)
Recommended prepurification:	Residual oil content (aerosols) < 0,01 mg/m <sup>3</sup> , e.g. by sub microfilter

PERFORMANCE DATA

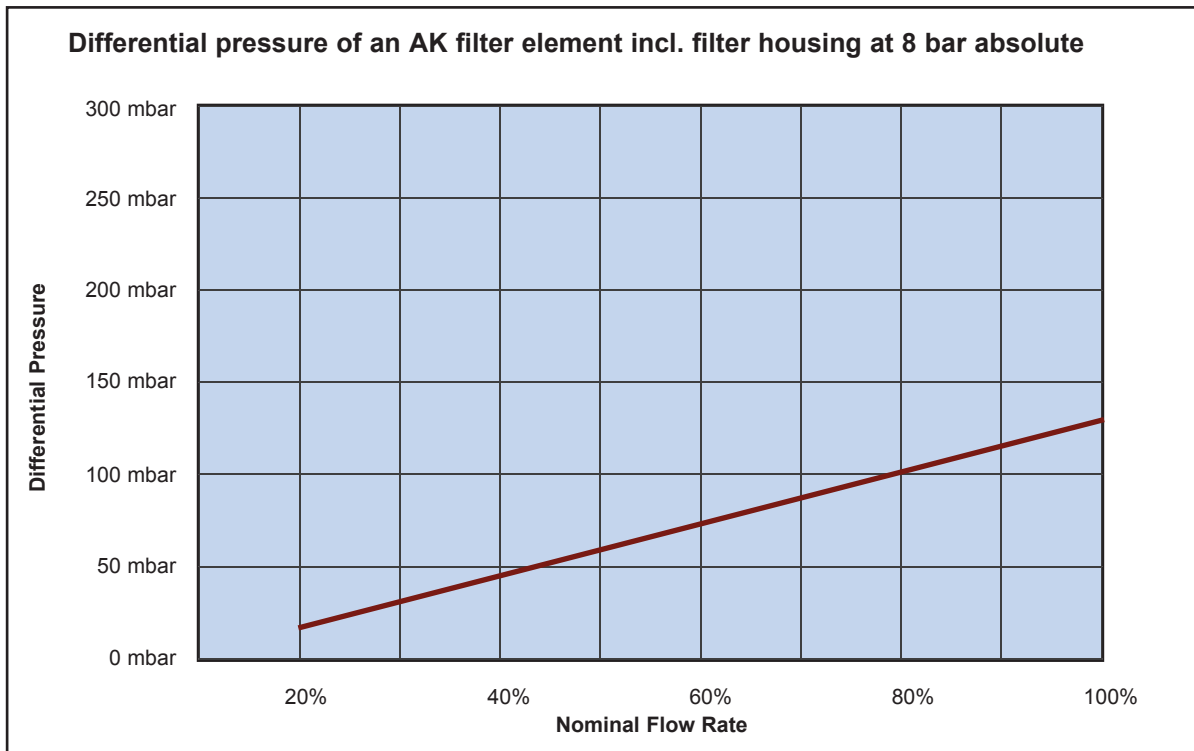

Operating pressure bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Conversion factor fp	0,25	0,38	0,50	0,63	0,75	0,88	<b>1,00</b>	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13

Element Type	Nominal Flow Rate at 7 bar g m³/h*	Sizing example for pressure which deviates from nominal pressure
02/05	20	$V_{nom} = 192 \text{ m}^3/\text{h}$ , operating pressure = 9 bar (g) $V_{korr} = \frac{V_{nom}}{fp}$ $V_{korr} = \frac{192 \text{ m}^3/\text{h}}{1,25} = 153,6 \text{ m}^3/\text{h}$  <b>Calculated size: Type 05/20</b>
03/05	40	
03/10	60	
04/10	90	
04/20	120	
05/20	180	
05/25	270	
07/25	360	
07/30	480	
10/30	720	
15/30	1080	
20/30	1440	
30/30	1920	
30/50	2880	

\* m³ related to 1 bar abs. and 20°C

## CERTIFICATE

**Certificate of compliance with the order**

according to  
DIN EN 10204 2.2

Confirmation of Design and Performance Data with Test Report.

Filter type	AK	Filter size	02/05 - 30/50
<b>Retention of oil vapours</b>			
Residual oil content (total) at appropriate prepurification		< 0,003 mg/m <sup>3</sup>	
Service life of the activated carbon stage		up to 2000 operating hours (depending on pre purification, operating temperature, operating pressure, volume flow and oil grade)	


**Wolfgang Bongartz**

Product Line Manager Industrial Filtration Technology  
Donaldson Filtration Deutschland GmbH