



# PP-FC 100

## ABSOLUTE MELT BLOWN DEPTH FILTER ELEMENTS

fits Donaldson Housings P-FG, P-PT

Process Filtration

**Melt blown polypropylene depth filter elements are an exceptional value for general applications where economical filtration is required.**

Donaldson® PP-FC 100 absolute depth filter elements are produced with proprietary melt blown microfiber technology using 100% pure polypropylene filter media. Our melt blown formula allows for exceptional dirt-holding capacity.

The PP-FC 100 uses an absolute graded density filter matrix—lower density at the surface of the filter with progressively higher density toward the center—which captures particles throughout the entire filter depth. This translates to higher efficiencies, longer life and fewer change outs, making the PP-FC 100 a great alternative to string-wound and nominal melt blown elements.



PP-FC 100

## APPLICATIONS

The Donaldson PP-FC 100 element is designed and developed for the following industries and applications:

- Potable water filtration
- Chemical filtration - wide chemical compatibility
- RO membrane pre-filtration, spray nozzle protection and cleaning
- Cooling towers
- Oil and gas process water
- Pulp and paper processing
- Trap filter for activated carbon
- Trap filter for sand
- Process water
- CIP water
- Distilled spirits
- Sediment retention for municipal wells

## SPECIFICATIONS

MATERIALS		CFR TITLE
Filter Media	Polypropylene	177.1520
End Cap (if applicable)	Polypropylene	177.1520
Gasket/O-Ring (if applicable)	EPDM (alternate material available upon request)	177.2600
Spring (if applicable)	Polypropylene	177.1520

DIMENSIONS	
Nominal Diameter	64 mm (2.5")
Nominal Length	254, 508, 762 or 1016 mm (10", 20", 30", or 40"). Alternate lengths available upon request.
Media Surface Area	0.06 m <sup>2</sup> (0.61 ft <sup>2</sup> ) per 254 mm (10") in length

## SPECIFICATIONS

### AVAILABLE MICRON RATINGS

0.5, 1, 3, 5, 10, 20, 30, 50, and 75 microns

### MAXIMUM TEMPERATURE

75° C (167° F)

### END CAP CONFIGURATION

Double Open End with Gasket, Plain End, Code 7, Spring End


### RECOMMENDED FILTER CHANGE INTERVAL

2.41 bar (35 psig) differential pressure

## FDA/NSF COMPLIANCE

Donaldson certifies that it uses no resin binders, lubricants, antistatic or release agents or other additives in the manufacture of these filter elements and that the resin used for manufacturing the filter media meets the food contact requirements of U.S. FDA 21 CFR regulations. All filter materials are NSF-61 certified.

**PP-FC 100 DIFFERENTIAL PRESSURE  
PER 254 MM (TEN INCH) EQUIVALENT (TIE) – WATER**

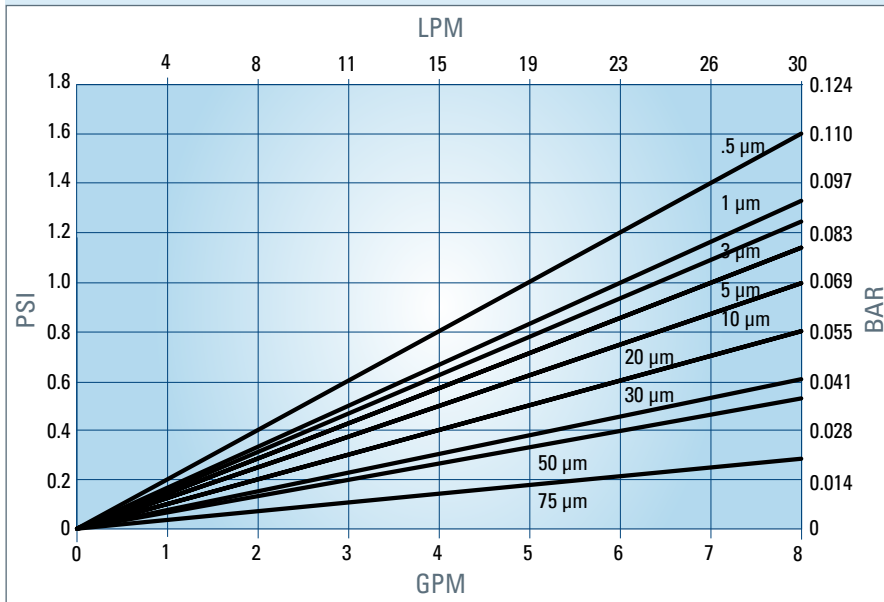

**Important Notice**

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, specifications, availability and data are subject to change without notice, and may vary by region or country.



**Donaldson Company, Inc.**  
Minneapolis, MN

**donaldson.com**  
**shop.donaldson.com**

**Australasia** 61-02-4350-2066  
marketing.australia@donaldson.com

**Brazil** 55-11-4894-6035  
vendas.brasil@donaldson.com

**China** 86-400-921-7032  
info.cn@donaldson.com

**EMEA** 49-2129-569-0  
cap-europe@donaldson.com

**India** 91-124-4807-400  
indiaenquiries@donaldson.com

**Japan** 81-42-540-4123  
ndl-ultrafilter-web@donaldson.com

**Korea** 82-2-517-3333  
cap-kr@donaldson.com

**Latin America** 52-449-300-2442  
industrialair@donaldson.com

**North America** 800-543-3634  
processfilters@donaldson.com

**South Africa** 27-11-997-6000  
samarketing@donaldson.com

**Southeast Asia** 65-6311-7373  
sea.salesenquiry@donaldson.com