



**Donaldson.**  
FILTRATION SOLUTIONS

# PRODUCT PROFILE

## P506073 CLEAN AND DRY DIESEL KIT

Ideal for all diesel fuel applications up to 189 lpm

### SPECIFICATIONS:

Flow rate to 189 lpm

Max working pressure: 350 psi

Connections: 1 1/4" NPT

### APPLICATIONS:

Service vehicles

Mobile tanks

Fixed bulk tanks

Industrial, agricultural,  
mining, transport

Modern diesel engines are being built to increasingly stringent specifications with finer operating tolerances. They require clean, dry fuel for optimum combustion, maximum power and the lowest emission levels. Dirt and water are the enemies of High Pressure Common Rail fuel systems and can dramatically reduce the service life of fuel system components.

This kit uses two high performance filters, in series, to clean your diesel fuel ready for use.

The first filter removes particulate contamination from diesel. Rated at <4um@BETA2000 (99.95% single pass), it is designed to target a cleanliness of ISO 14/13/11 in a single pass. The second filter uses a super absorbent polymer (SAP) that will not allow free water to pass. This combination of filters will ensure that your diesel is both clean and dry, for maximum performance.



For complete protection, Donaldson recommends installing a TRAP breather to keep airborne contamination and moisture from entering your tank. Select from one of the listed options.

### OPTIONAL TRAP BREATHERS

#### FOR MOBILE TANKS:



P766645 - 3/4" BSP Anti-splash T.R.A.P.

P766646 - 1" BSP Anti-splash T.R.A.P.

#### FOR FIXED TANKS < 1000 LITRES:



P564669 - 1" NPT T.R.A.P.

P565616 - Bayonet T.R.A.P.

#### FOR FIXED TANKS > 1000 LITRES:



P923075 - T.R.A.P. Breather Cartridge

1KDF0078 - T.R.A.P. Breather Assembly


Image	Part No.	Description	Qty
	P570330	Single Head 1 1/4" NPT	2
	P573642	Threaded Adapter Length: 41mm Thread Size: 1 1/4" NPT	1
	P568666	< 4 Micron @ Beta 2000	1
	P570248	SAP Water Absorbing Filter (Not suited for ethanol or ethanol blends)	1
	P573681	Pressure Gauge 0-60 psi Thread Size: 1/8" NPT	2
	P573682	Gauge Adapter Inlet Diameter: Male 9/16" - 18 UNF" Outlet Diameter: Female 1/8" NPT	2

# CLEAN. PROTECT. POLISH

## 1. Clean

## 2. Protect

## 3. Polish

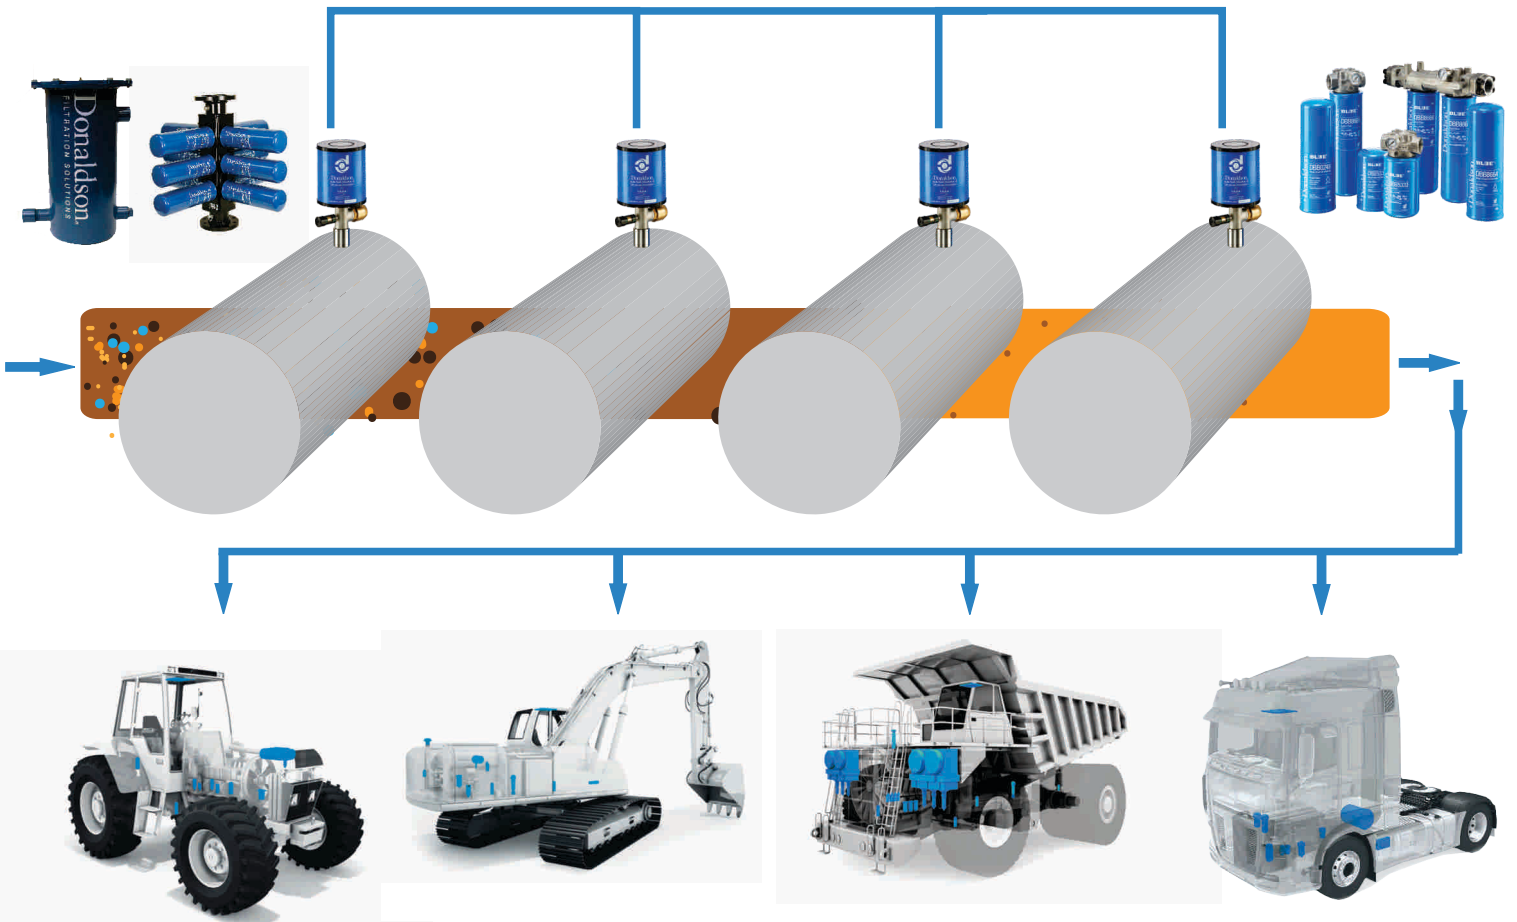

**Donaldson**  
FILTRATION SOLUTIONS

### Total Filtration Management

Donaldson offers a wide variety of solutions to reduce your energy costs, improve your productivity, guarantee production quality and help protect the environment.

### Total Filtration Service

A comprehensive range of services keeps your production at peak performance and at the lowest total cost of ownership.

Donaldson Filtration Systems (Pty) Ltd  
4 Lake Road  
Longmeadow Business Estate  
Extension 8  
Modderfontein, Johannesburg

+27 (0) 11 997 6000  
SAMarketing@donaldson.com  
[www.donaldson.co.za](http://www.donaldson.co.za)